
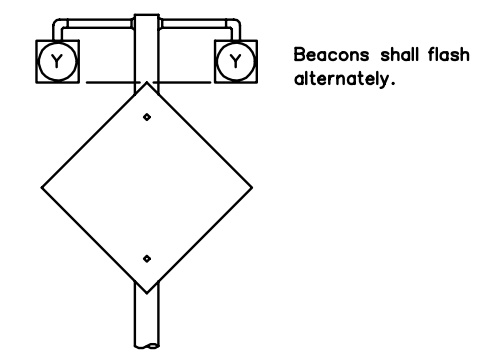


- Notes:**
- All signal lenses shall be 12".
 - Post to be drilled for breakaway and installed in accordance with WSP-1, pages 1301.57 & 1301.58.
 - All elbows and condulets shall have set screws or lock nuts to prevent rotation.
 - Miscellaneous hardware shall be stainless steel.
 - Channelling shall be galvanized steel.
 - A water proof sealant shall be utilized between the elbow & signal head.

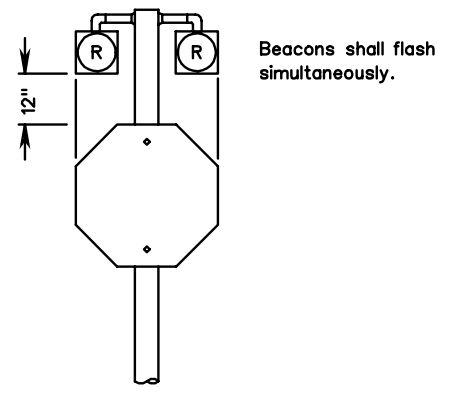

BEACON ALIGNMENT DETAIL

FLASHING BEACON INSTALLATION DETAILS