



ACCESSIBLE ROUTE DETAIL




SECTION F-F



SECTION D-D


ACCESSIBLE ROUTE IS DEFINED AS A CONTINUOUS UNOBSTRUCTED, STABLE, FIRM AND SLIP RESISTANT PATH CONNECTING ALL ACCESSIBLE ELEMENTS OF A FACILITY THAT CAN BE APPROACHED, ENTERED AND USED BY PERSONS WITH MOBILITY IMPAIRMENTS.

\* IF ACCESSIBLE ROUTES ARE BEING PROVIDED, A MINIMUM 3' TRAVERSABLE WIDTH IS REQUIRED.



SECTION E-E

WHEN USED IN CONJUNCTION WITH STANDARD CG-3 OR CG-7, THE CURB FACE ON THIS STANDARD IS TO BE ADJUSTED TO MATCH THE MOUNTABLE CURB CONFIGURATION.

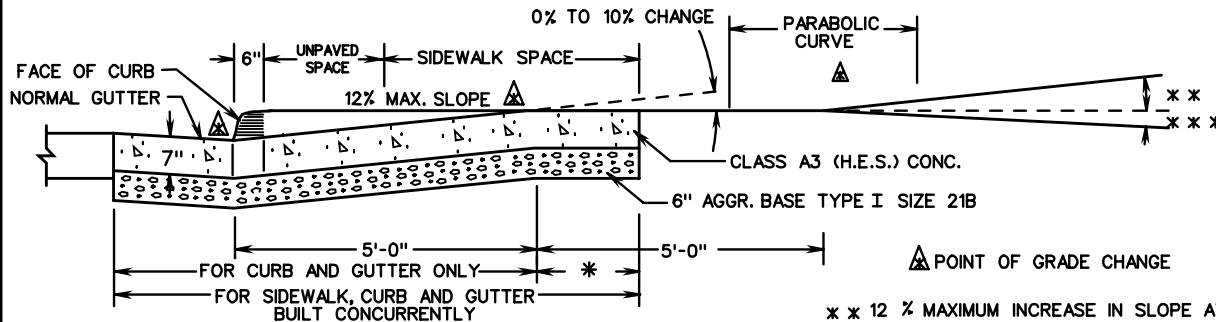

SECTION C-C

\* \* 12 % MAXIMUM INCREASE IN SLOPE AT MINIMUM 10' INTERVALS  
 \* \* \* 3 % MAXIMUM DECREASE IN SLOPE FOR FIRST 10' INTERVAL AND  
 8 % MAXIMUM DECREASE FOR SUCCEEDING MINIMUM 10' INTERVALS

SPECIFICATION REFERENCE

502

# STANDARD ENTRANCE GUTTER FOR USE WITH UNPAVED SPACE BETWEEN CURB & SIDEWALK

VIRGINIA DEPARTMENT OF TRANSPORTATION